


159WH-07026

water-cooled motor / generator with 14 kW continuous power

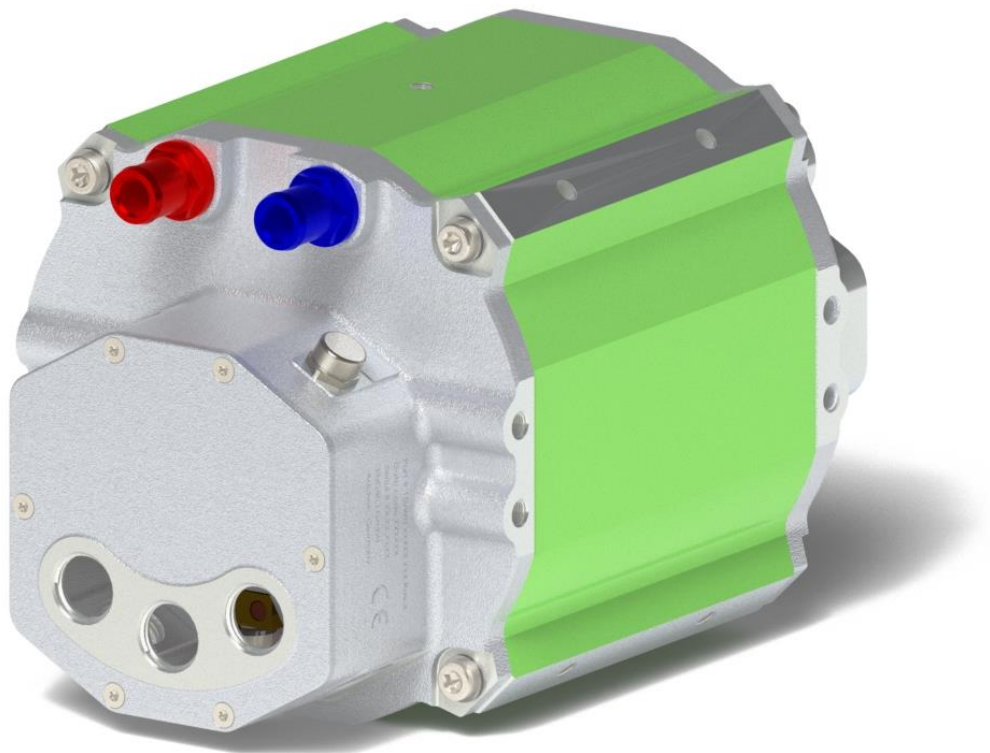

KEY FEATURES

- permanent magnet synchronous machine
- water-cooled
- convincing cost-benefit ratio
- Recommended voltage range from 48V to 200V
- delivery with controller possible

Section	Page
Operating Range	3
Additional Data	5
Certifications	6
Available Type Variants	7
Technical Drawings	8
Performance Plots	9
Additional Characteristics	10

Note:

On September 1st, 2024, we transferred our ERP systems to SAP. Due to this change, we are altering our **current part numbers**. To see how our article numbers and motor naming scheme has changed, please consider the conversion table below:

Article number conversion				
Part.no.	Old part.no.	Flange	Shaft	Position sensor
4663926	159WH_07026_CGE	C1	G1	E
4670540	159WH_07026_SHE	S1	H1	E


To be noted:

The information in this technical data sheet is based on our current knowledge and experience. Due to the wide range of possible influences during application, they do not exempt the processor and user from carrying out their own tests and trials. Although the suitability for a specific application can be estimated from our information, a legally binding assurance is by no means possible. Depending on the individual case, we recommend consultation with us. Any industrial property rights and applicable laws must be observed by the recipient of our products on his own responsibility.

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

Characteristic Operation Points ¹⁾					
		S1	S2	S2	
Feasible operation time	t_{peak}	continuous	30 min	60 sec	
Torque	T	52 ²⁾	52 ²⁾	91	Nm
Power	P	14	14	19	kW
Phase rms-current (AC)	I_{rms}	187 ³⁾	187 ³⁾	380 ³⁾	A
Battery voltage (DC)	U_{DC}	96	96	96	V
Speed	n	2500	2500	2000	rpm
Electric frequency	f_{el}	208	208	166	Hz
Efficiency	η_{tot}	93	93	83	%
Power factor	$\cos(\varphi)$	0.88	0.88	0.62	
Cooling	specified on page 5				

Maximum Operating Range					
		Max.			
Torque	T_{max}	91 @ 2000 rpm			Nm
Power	P_{max}	20 @ 2250 rpm			kW
Phase rms-current (AC)	$I_{rms,max}$	400 ³⁾⁴⁾			A
Battery voltage (DC)	U_{max}	200			V
Speed	n_{max}	8000			rpm
Electric frequency	$f_{el,max}$	666			Hz

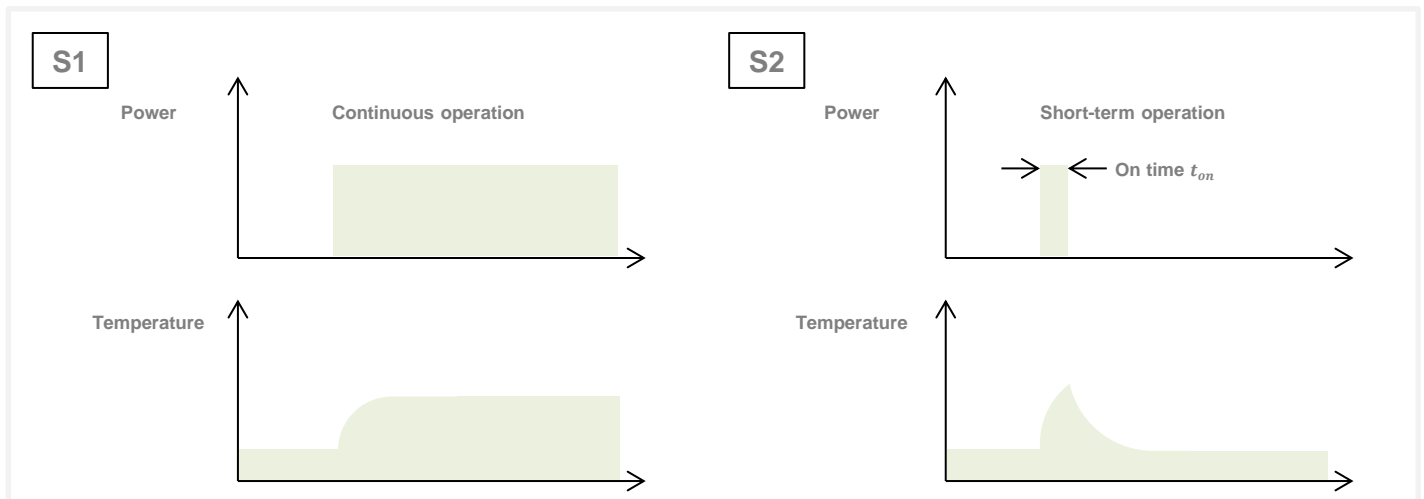


- 1) Defined Range only valid for a power factor of 1 at DC input
- 2) Torque rating is dependant on rotor temperature
- 3) The cables must not exceed a temperature of 140 °C at any time. Temperature and service life depend on the installation condition.
- 4) Peak rating for max. 60 seconds on time

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

S9 Operating Points Maximum Feasible Power in % of S1

$U_{nom} = 96\text{ V}$		Prior operating point in % of S1				
		0 %	25 %	50 %	75 %	100 %
On time t_{peak}	30 s	135%	130%	120%	110%	100%
	180 s	115%	110%	110%	100%	100%
	420 s	100%	100%	100%	100%	100%

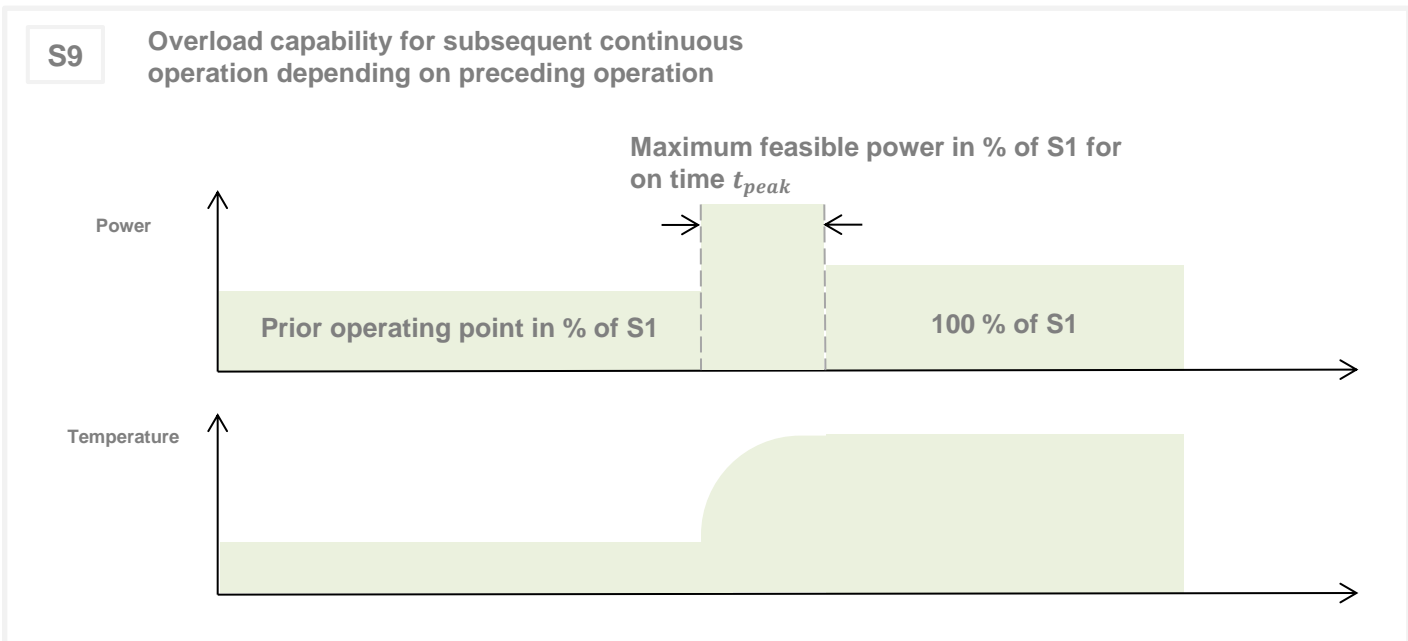

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

Electrical Data			
Number of phases			3
Number of pole pairs			5
Maximal efficiency			92 %
T/I constant (I<Inom)			0.28 Nm/A _{rms}
U/n constant (AC)	rms:	17	peak: 25 V/(1000rpm)
Ke constant (AC)	rms:	0.041	peak: 0.06 V/(rad*s ⁻¹)
Additional Data			
Rotor moment of inertia			0.006 kg*m ²
Allowed range of ambient temperature			-20 ... +85 °C
Maximal motor temperature			140 °C
Cooling	Advised medium (OAT Coolants)	water/glycol - 50/50 <ul style="list-style-type: none"> ▪ TL 774-D/F ▪ VIN 878389 ▪ MAN 324 SNF ▪ MTL 5048 	
	Flow rate		6 l/min
	Inlet temperature		45 ¹⁾ °C
	Pressure drop		< 0.15 bar
	Maximum pressure		2 bar
	Cooling channel volume		0.53 l
Temperature monitoring			1 x KTY84-130
Ports			
Power terminals			3 x M25 cable glands
Signal connectors			Deutsch DTM04-08PA
Cooling connectors			inner Ø 12 mm, outer Ø 19 mm

1) Derating >45 °C

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.


Certifications	
Type approval	CE, DIN EN 60034
Environmental	Prepared for ISO 9227 (salt-spray test)
Protection grade	ISO 20653 IP6K9K ¹⁾
Vibrations, shock	ISO 16750-3
Customs tariff number	8501 5230

- 1) Please note that the IP6K9K rating is only valid if the machine is installed with suitable cable glands and an appropriate sealed interface at the drive side of the motor (flange and/or shaft). Please contact ENGIRO for further questions

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

Shaft and Flange Combinations for 159WH-07026-ABC		Flange (A)	
		C1 (SAE J744 101-2 (B), Ø101,6 mm hydraulic pump)	S1 (SAE J744 82-2 (A), Ø82,55 mm hydraulic pump)
Shaft (B)	G1 (ANSI B 92.1 13T 16/32 DP 30° flat root side fit, Tol. Class 5)	● (≈ 21,5 kg)	
	H1 (ANSI B92.1 9T 16/32 DP 30° flat root side fit, Tol. Class 5)		● (≈ 20,7 kg)
Position Sensor (C)		E: Sin/cos encoder	


Other individual combinations are also possible on request.

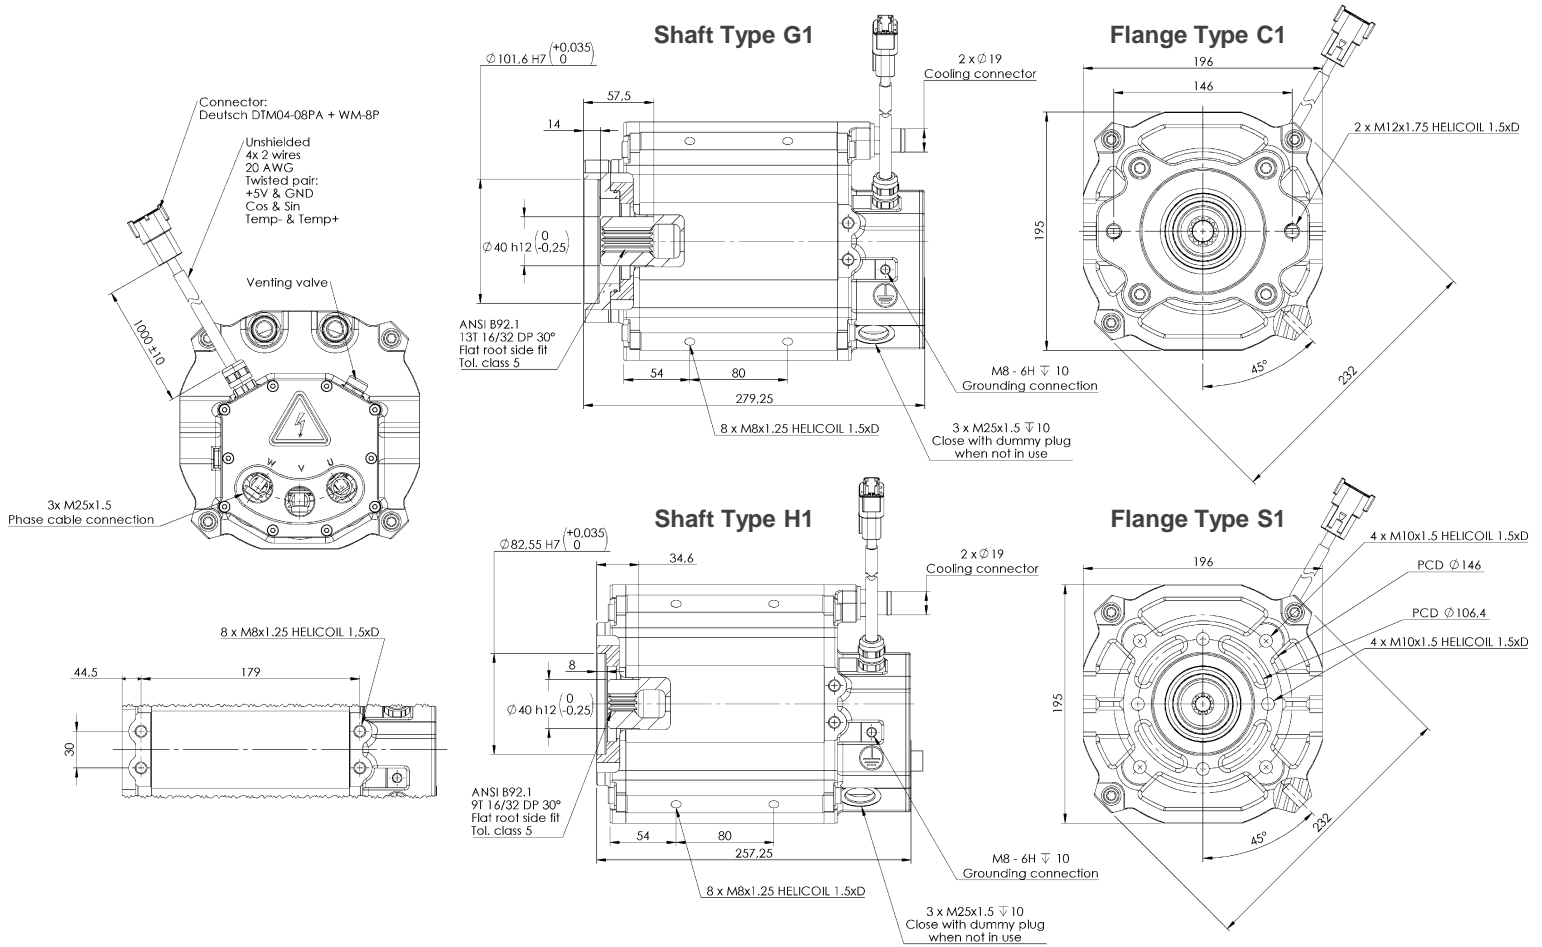

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.


96V

Simulated Efficiency of Motor Application
(electric machine only)

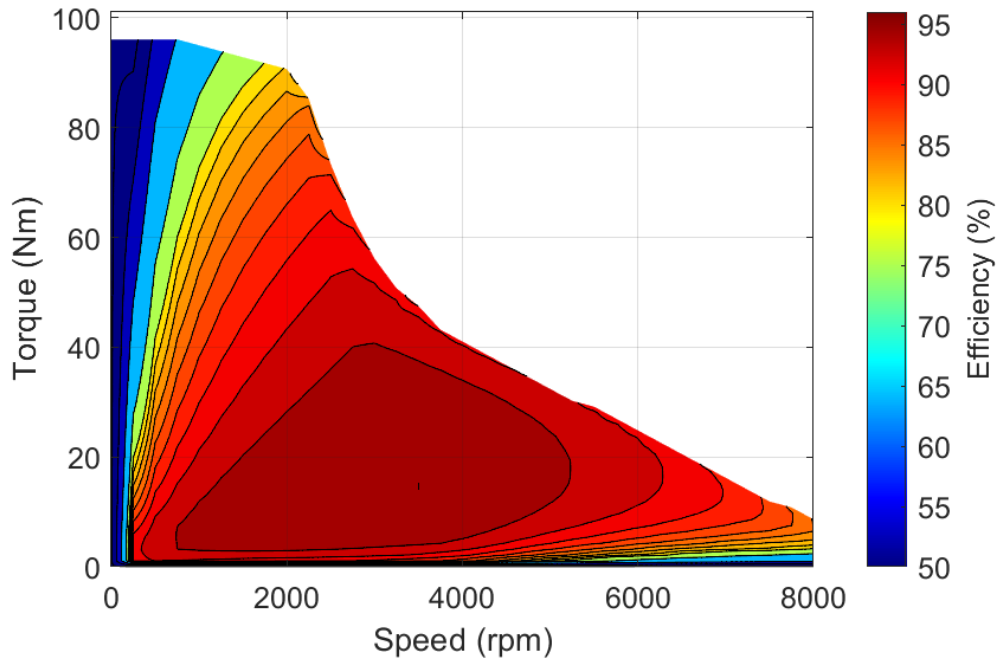





96V

Simulated Characteristic Motor Parameters
solid lines: continuous; dashed lines: maximum

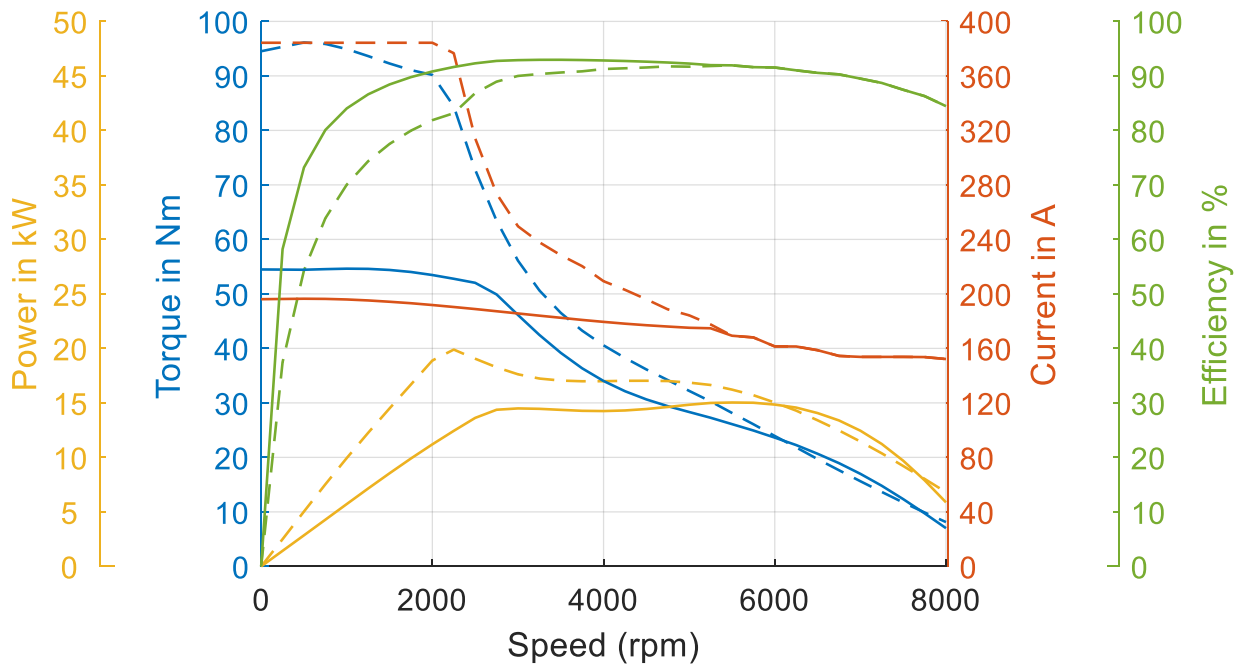

1) Simulated with Curtis

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

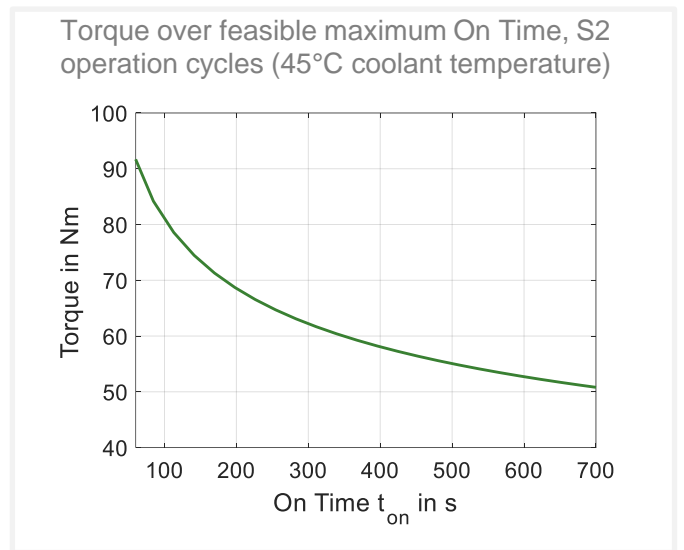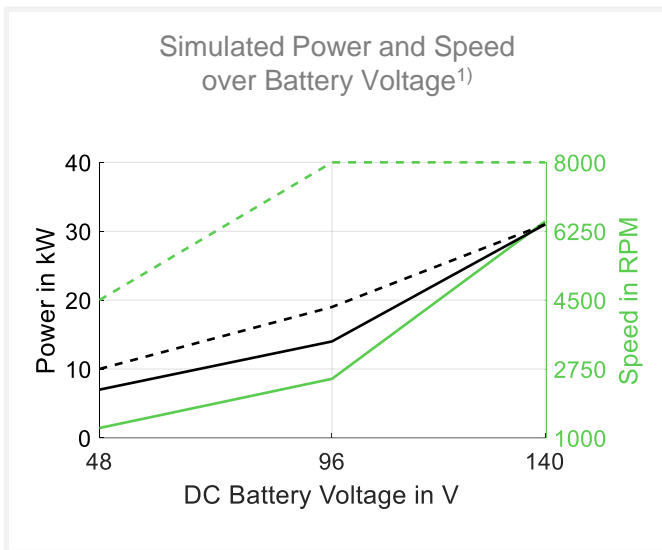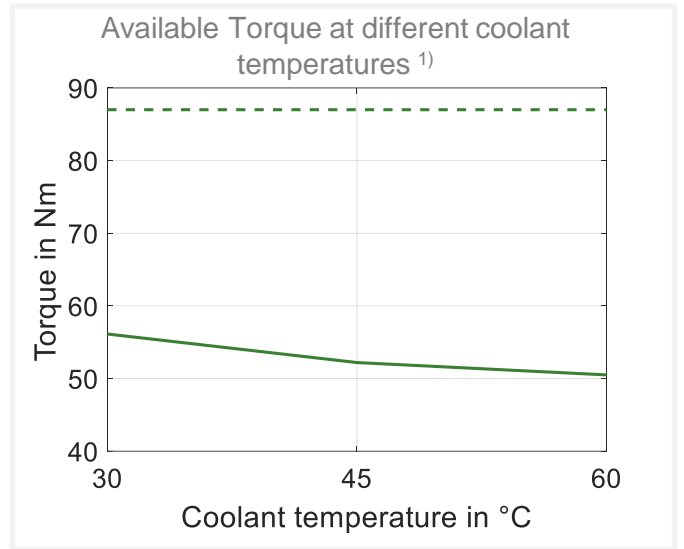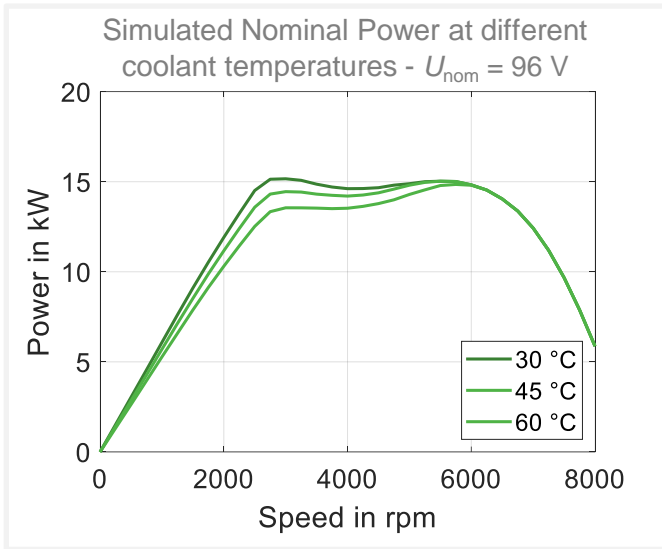

1) solid lines: continuous; dashed lines: maximum;

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.