


Data Sheet

205W-08020-ABC

water-cooled motor / generator with up to 26 kW continuous power

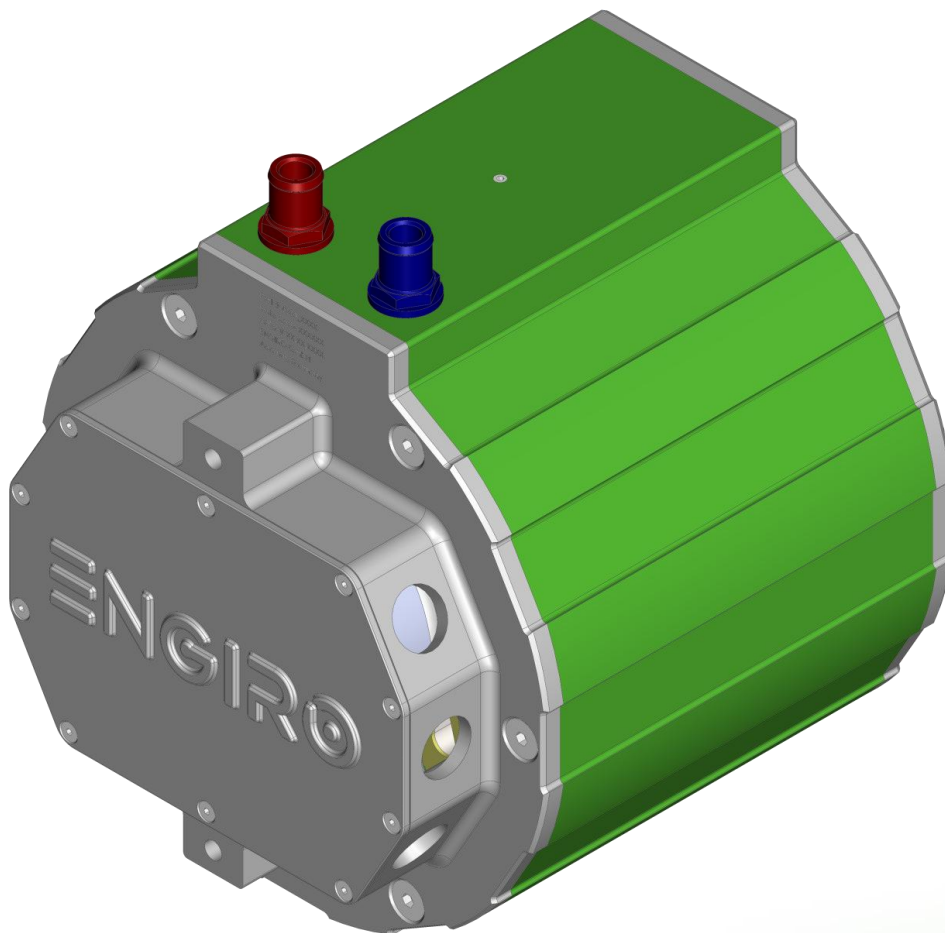

KEY FEATURES

- permanent magnet synchronous machine
- water-cooled
- high peak power for motor applications
- convincing cost-benefit ratio
- recommended voltage range from 48V to 200V
- delivery with controller possible
- various mechanical interfaces available

Section	Page
Technical Data Machine	3
Table Shaft and Flange Combinations	4
Technical Drawings Machine	4
Characteristics Machine 48V	5
Characteristics Machine 140V	6

Note:

On September 1st, 2024, we transferred our ERP systems to SAP. Due to this change, we are altering our current part numbers. To see how our article numbers and motor naming scheme has changed, please consider the conversion table below:

Article number conversion				
Part.no.	Old part.no.	Flange	Shaft	Position sensor
4752240	205W_08020_SSE	S1	S1	E

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

Nominal Operation (S1, cooling as specified below)

Torque	T_{nom}	89	82	Nm
Power	P_{nom}	9.8	26	kW
Speed	n_{nom}	1050	3100	rpm
Phase rms-current	I_{nom}	254 ^{1,2)}	237 ^{1,2)}	A
Battery voltage (DC)	U_{nom}	48	140	V
Electric frequency	$f_{el,nom}$	70	207	Hz
Power factor	$\cos(\varphi)$	0.72	0.69	

Maximal Values (S2, 10s, cooling as specified below)

Torque	T_{max}	188	188	Nm
Power	P_{max}	14	44	kW
Phase rms-current	I_{max}	625 ²⁾	625 ²⁾	A
Battery voltage (DC)	U_{max}		200	V
Speed	n_{max}		8000	rpm
Electric frequency	$f_{el,max}$		533	Hz

Electrical Data

Number of phases				3
Number of pole pairs				4
Maximal efficiency				96 %
T/I constant ($I < I_{nom}$)				0.36 Nm/A _{rms}
U/n constant (AC) at a temperature of 30°C	rms:	24.4	peak:	41.5 V/(1000rpm)
K_e constant (AC) at a temperature of 30°C	rms:	0.058	peak:	0.099 V/(rad*s ⁻¹)

Additional Data

Weight (w/o cables)				see page 4
Rotor moment of inertia				0.0149 kg*m ²
Protection category				IP6K9K ³⁾
Maximal motor temperature				140 °C
Allowed ambient temperature				-20 ... 45 ⁴⁾ °C
Cooling (medium, flow rate, inlet temperature, pressure)				water/glycol 50/50, 8 l/min, ≤ 45°C, ≤ 0.5 bar
Temperature monitoring				1 x KTY84-130
Type approval				CE, EN 60034
Customs tariff number				8501 5230

Connectors

Power terminals				3 x M25 cable gland
Signal connectors				M16, 10 Pin Hummel Connector
Cooling connectors				2 x ¾" / 19 mm

¹⁾ Nominal current strongly dependent on cooling as specified below.

²⁾ The cables must not exceed a temperature of 140 °C at any time. Temperature and service life depend on the installation condition.

³⁾ Please note that the IP6K9K rating is only valid if the machine is installed with suitable cable glands and an appropriate sealed interface at the drive side of the motor (flange and/or shaft). Please contact ENGIRO for further questions.


⁴⁾ other range on request

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.



Available Type Variants			
Flange	Shaft	Pos. sensor	Weight (kg)
<p>S1 Standard with 4xM10x35 threaded stud</p>	<p>S1 Cylindrical shaft with keyway \varnothing 28mm</p>	<p>E Encoder</p>	<p>\approx 36 kg</p>

Other individual combinations are also possible on request.

Technical Drawings

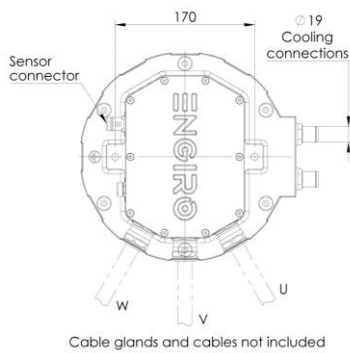


**Flange S
Shaft S**

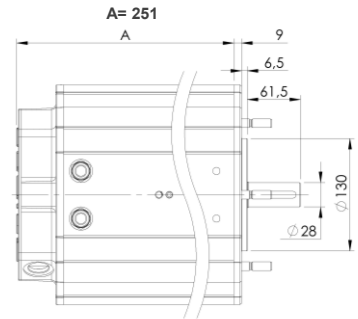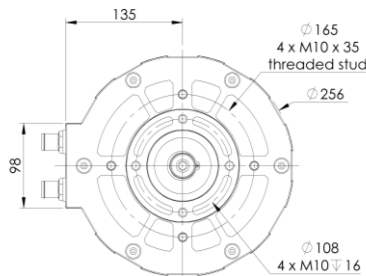

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

Simulated Efficiency of Motor Application


(electric machine only; $U_{nom} = 48\text{ V}$; machine at 140 °C ;))

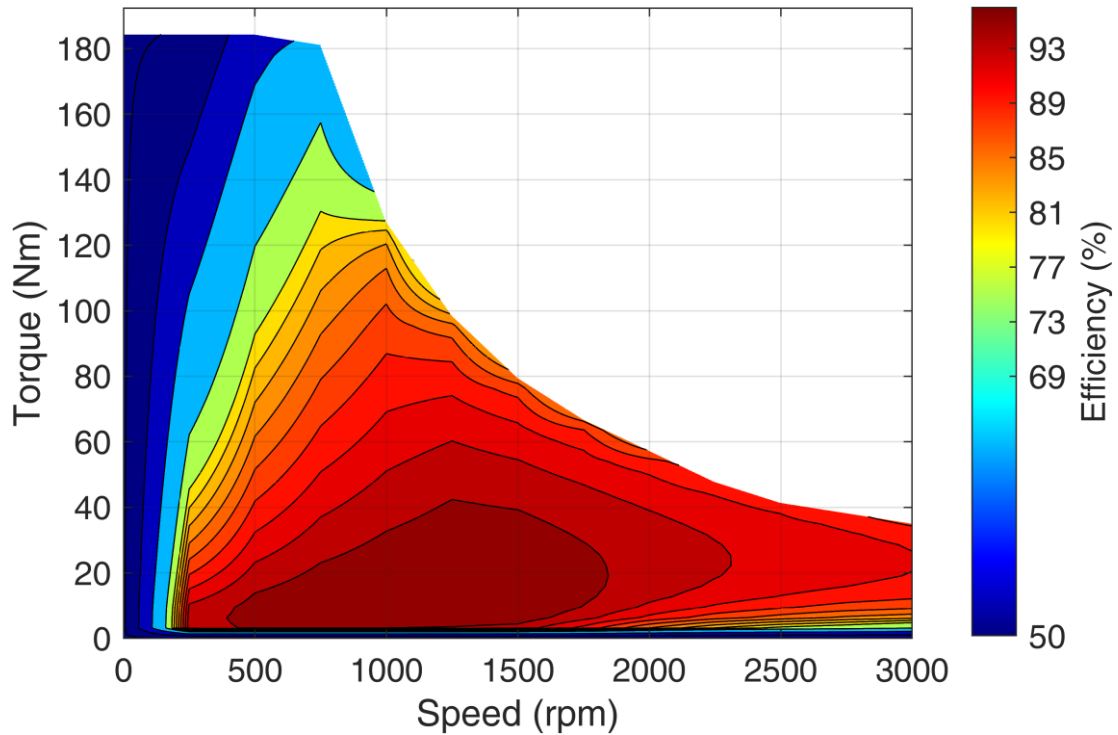

Simulated Characteristic Motor Parameters

$U_{nom} = 48\text{ V}$


solid lines: continuous; dashed lines: maximum;

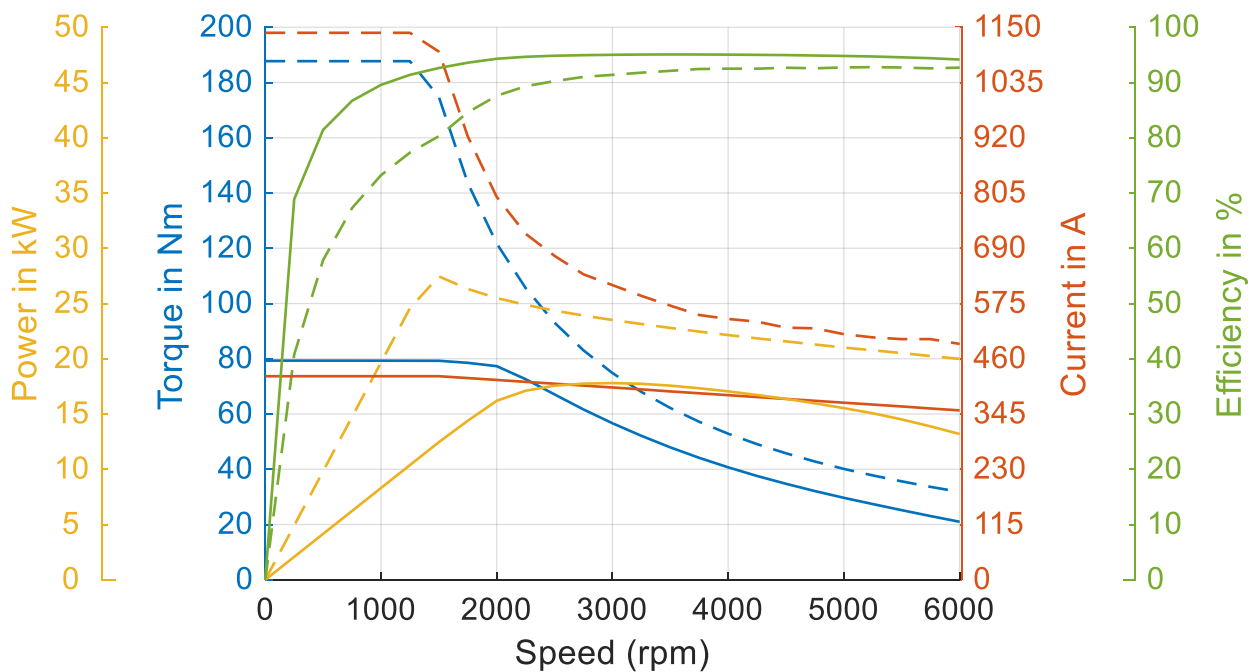

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

Simulated Efficiency of Motor Application


(electric machine only; $U_{nom} = 140 \text{ V}$; machine at $140 \text{ }^\circ\text{C}$;))

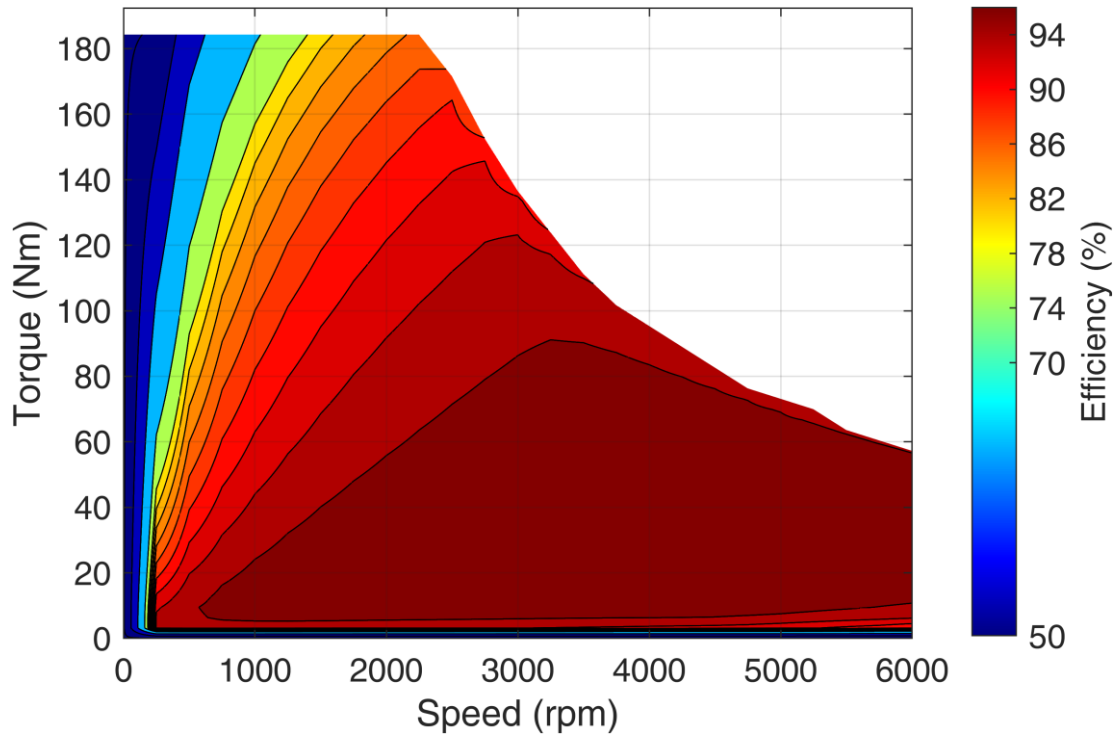

Simulated Characteristic Motor Parameters

$U_{nom} = 140 \text{ V}$

solid lines: continuous; dashed lines: maximum;

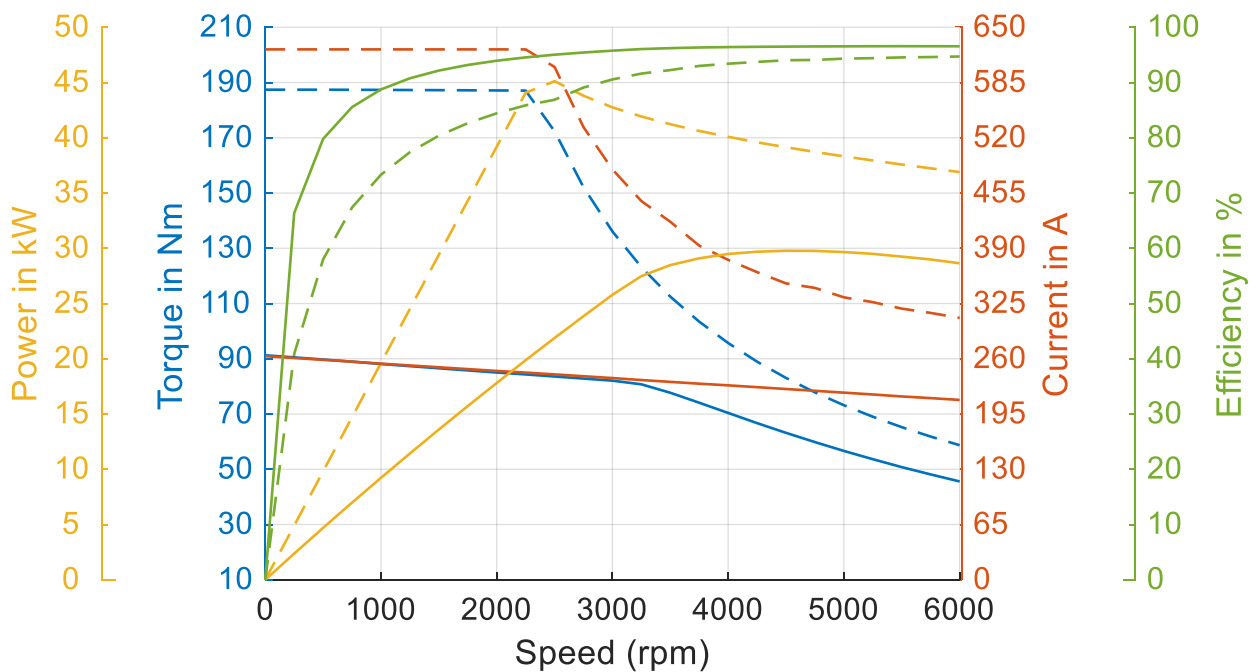

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.