


# 205W-08095-ABC

water-cooled motor / generator with up to 31 kW continuous power

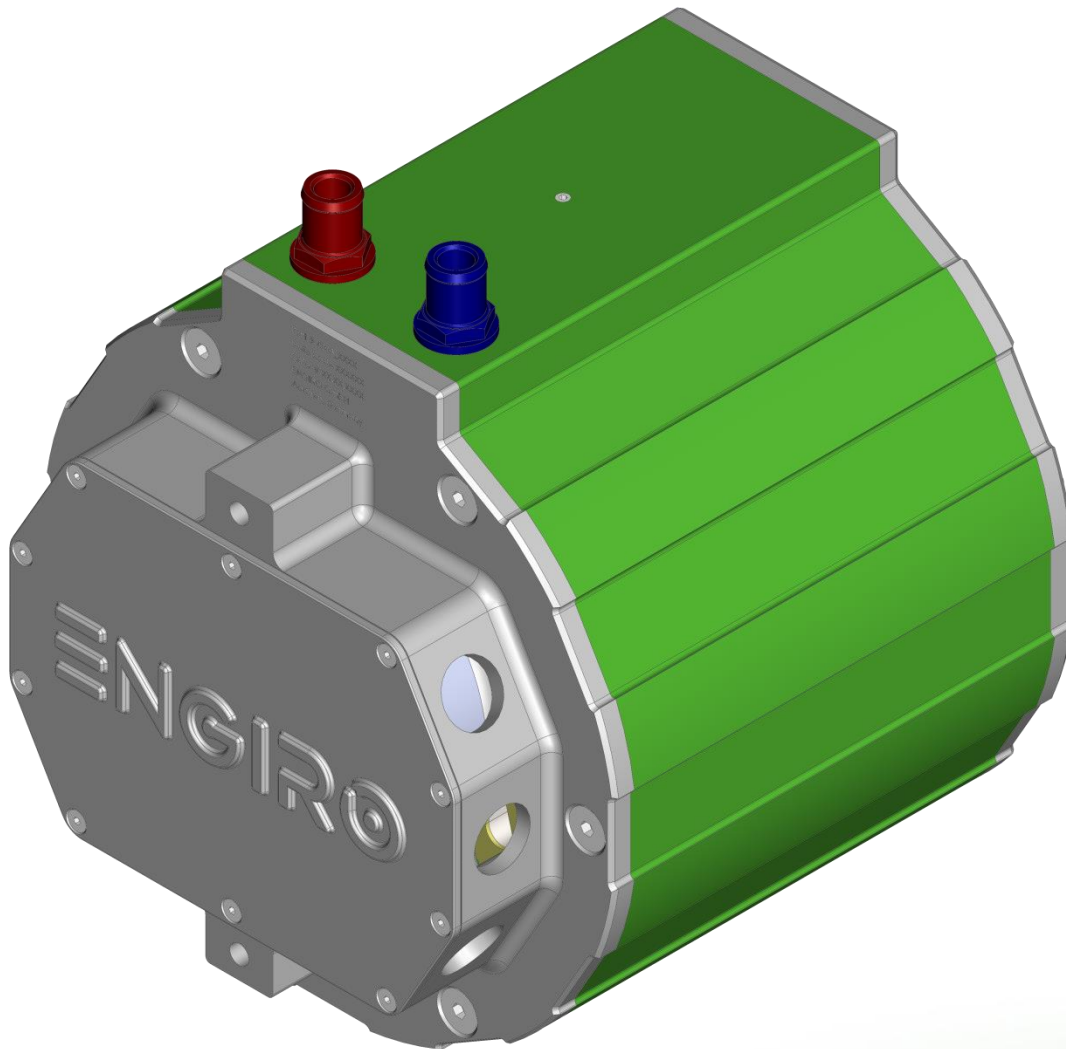

## KEY FEATURES

- permanent magnet synchronous machine
- water-cooled
- high peak power for motor applications
- convincing cost-benefit ratio
- recommended voltage range from 500V to 850V
- delivery with controller possible
- various mechanical interfaces available

Section	Page
Technical Data Machine	3
Technical Drawings Machine	4
Characteristics Machine – 400V	5
Characteristics Machine – 700V	6

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

Nominal Operation (S1, cooling as specified below)				
Torque	$M_{nom}$	88	82	Nm
Power	$P_{nom}$	17	28	kW
Speed	$n_{nom}$	1750	3270	rpm
Phase rms-current	$I_{nom}$	54 <sup>1,2)</sup>	51 <sup>1,2)</sup>	A
Battery voltage (DC)	$U_{nom}$	400	700	V
Electric frequency	$f_{el,nom}$	117	218	Hz
Power factor	$\cos(\varphi)$	0.70	0.72	

Maximal Values (S2, 10s, cooling as specified below)				
Torque	$M_{max}$	188	189	Nm
Power	$P_{max}$	26	48	kW
Phase rms-current	$I_{max}$	132 <sup>2)</sup>	132 <sup>2)</sup>	A
Battery voltage (DC)	$U_{max}$		850	V
Speed	$n_{max}$		6100	rpm
Electric frequency	$f_{el,max}$		407	Hz

Electrical Data				
Number of phases			3	
Number of pole pairs			4	
Maximal efficiency			96	%
$T/I$ constant ( $I < I_{nom}$ )			1.69	Nm/A <sub>rms</sub>
$U/n$ constant (AC) at a temperature of 30°C	rms:	116	peak:	197.2 V/(1000rpm)
$K_e$ constant (AC) at a temperature of 30°C	rms:	0.277	peak:	0.471 V/(rad*s <sup>-1</sup> )

Additional Data				
Weight (w/o cables)			see page 4	
Rotor moment of inertia			0.0123	kg*m <sup>2</sup>
Protection category			IP6K9K <sup>3)</sup>	
Maximal motor temperature			140	°C
Allowed ambient temperature			-20 ... 45 <sup>4)</sup>	°C
Cooling (medium, flow rate, inlet temperature, pressure)			water/glycol 50/50, 8 l/min, ≤ 45°C, ≤ 0.5 bar	
Temperature monitoring			1 x KTY84-130	
Type approval			CE, EN 60034	
Customs tariff number			8501 5230	

Connectors				
Power terminals			3 x M25 cable gland	
Signal connectors			M16, 10 Pin	
Cooling connectors			2 x ¾" / 19 mm	

<sup>1)</sup> Nominal current strongly dependent on cooling as specified below.

<sup>2)</sup> The cables must not exceed a temperature of 140 °C at any time. Temperature and service life depend on the installation condition.

<sup>3)</sup> Please note that the IP6K9K rating is only valid if the machine is installed with suitable cable glands and an appropriate sealed interface at the drive side of the motor (flange and/or shaft). Please contact ENGIRO for further questions.



<sup>4)</sup> other range on request

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

Available Type Variants

type number	A: flange	B: shaft	C: position sensor
205W-08095-	S: standard	S: cylindrical shaft with keyway $\varnothing 28\text{mm}$	R: resolver (gain 0.5)
	B: flange for fan motor	H: hollow shaft with internal splines ANSI B 92.1	F: resolver (gain 0.29)
	C: flange for fan without insert	C: cylindrical shaft with keyway $\varnothing 35\text{mm}$	N: none
		D: hollow shaft with internal splines ANSI B 92.1	


Approximate machine weight		
flange	shaft	kg
S	S	35
S	H	34
C	D	37
B	C	39

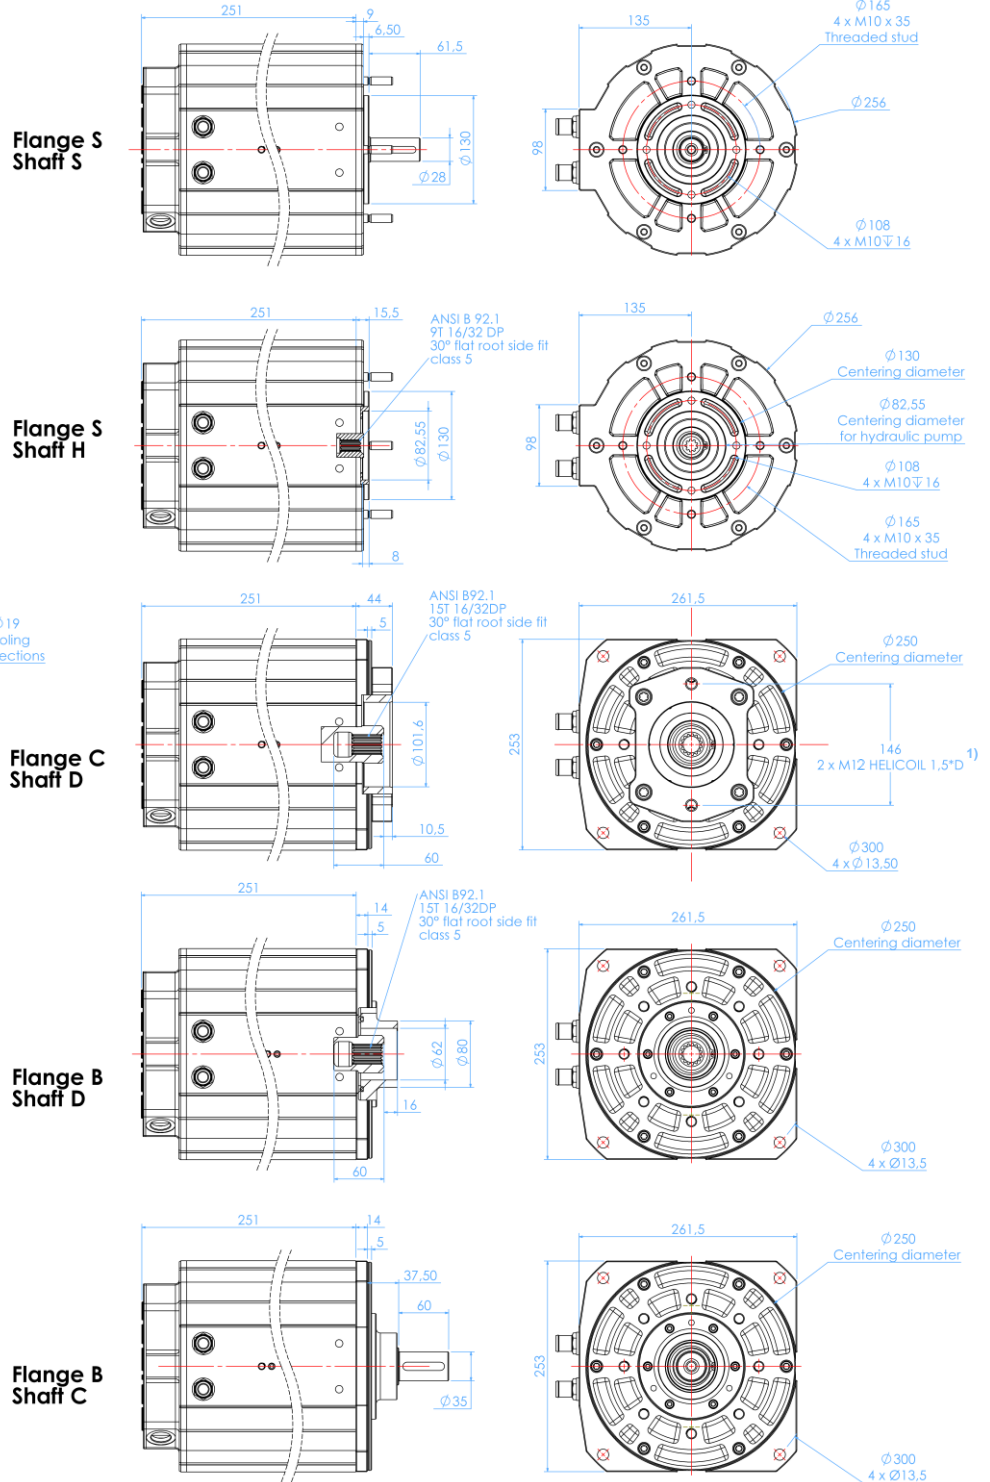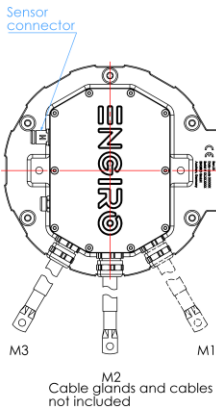


<sup>1)</sup> Machines with C-Flange and a revision number smaller than Rev15 have an M14 Helicoil 1,5"D. Revision number is printed on each machine on the rear flange below the water-cooling hose bars.

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

Simulated Efficiency of Motor Application  
(electric machine only;  $U_{nom} = 400\text{ V}$ ; machine at  $140\text{ °C}$ ;)

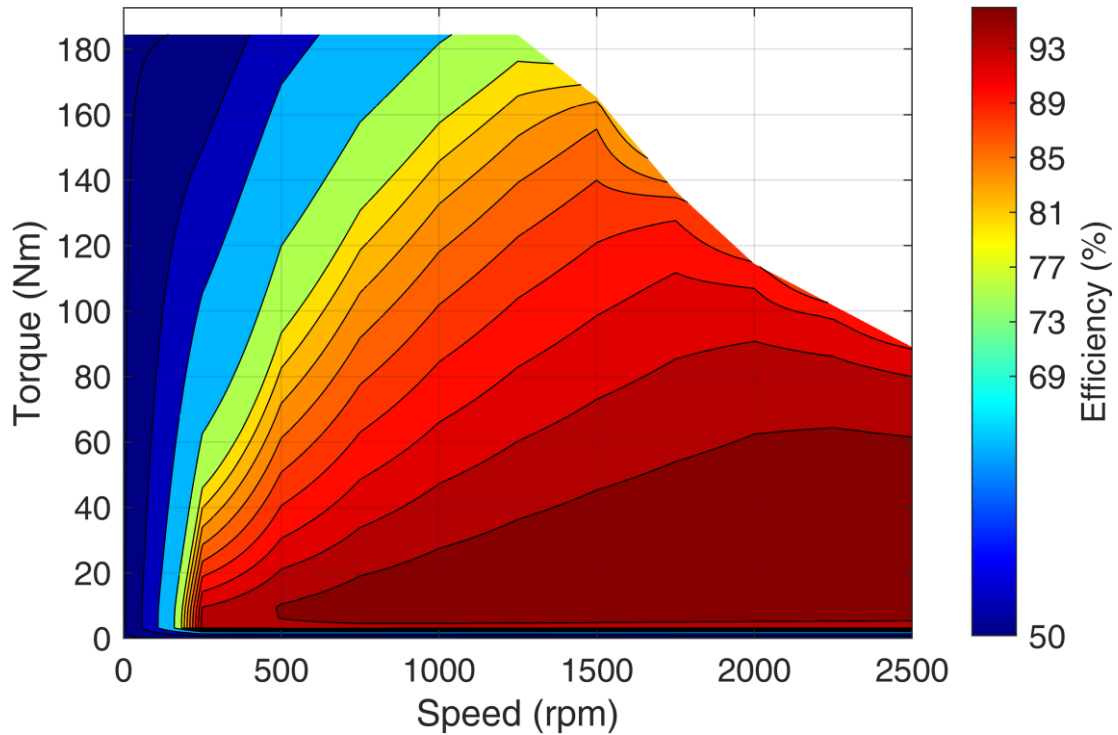


Simulated Characteristic Motor Parameters  
 $U_{nom} = 400\text{ V}$   
solid lines: continuous; dashed lines: maximum;

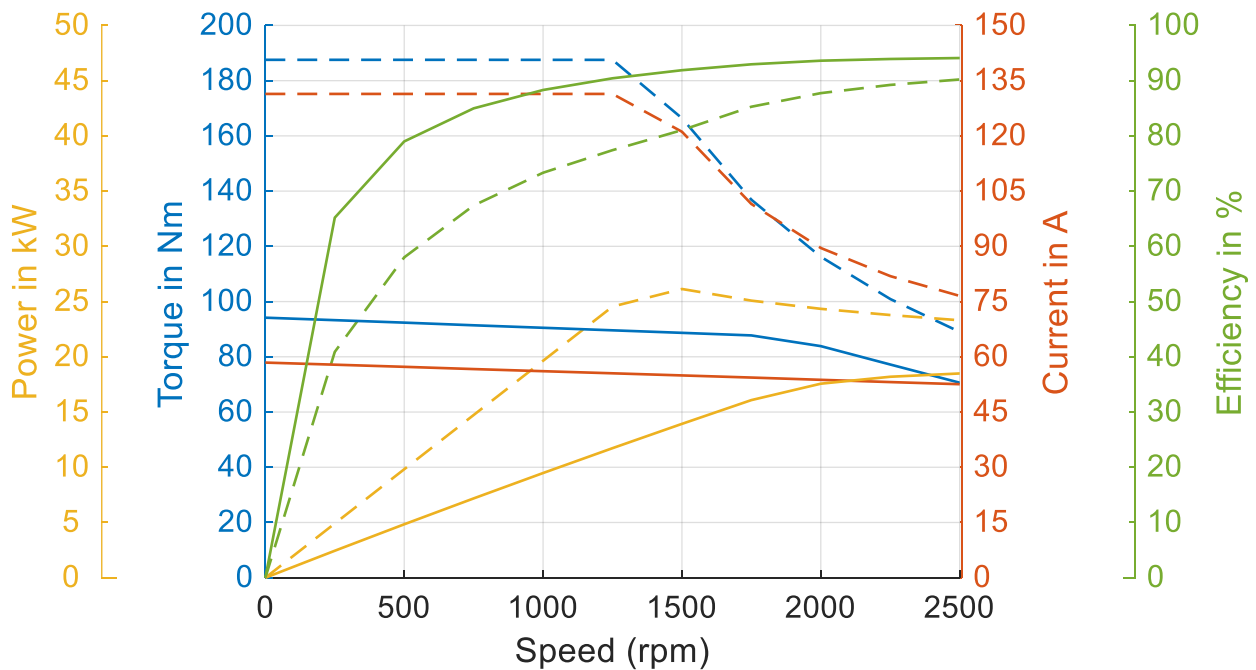


Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.

Simulated Efficiency of Motor Application  
(electric machine only;  $U_{nom} = 700\text{ V}$ ; machine at  $140\text{ °C}$ ;)

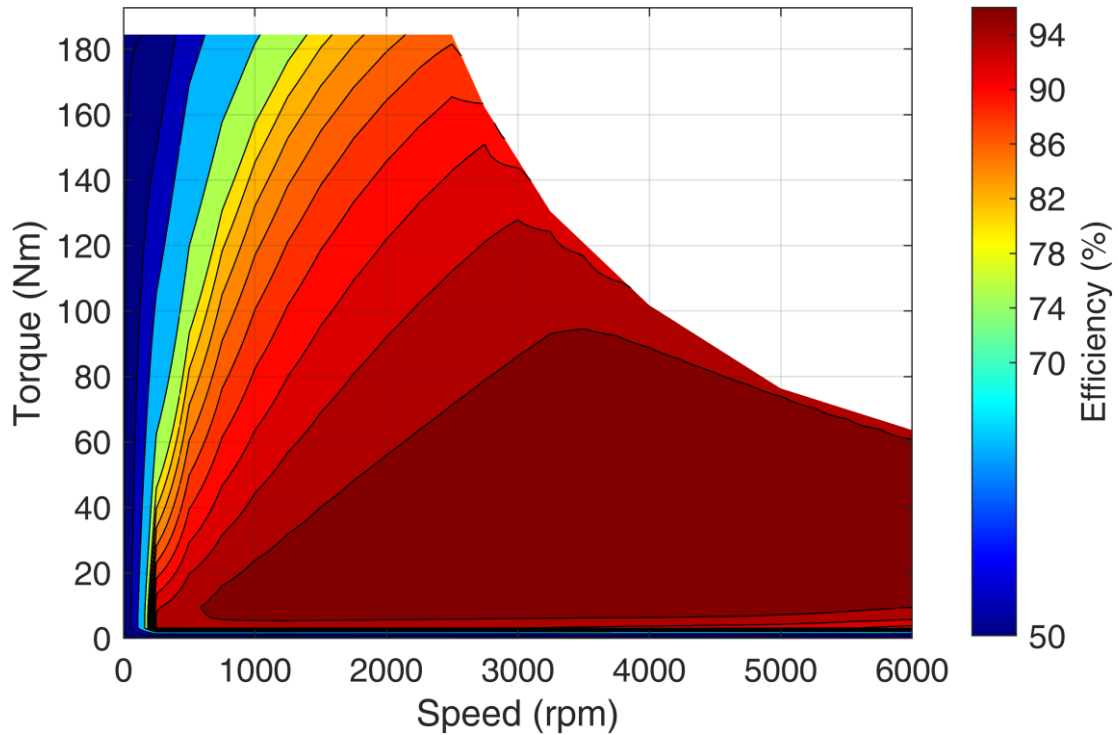

Simulated Characteristic Motor Parameters  
 $U_{nom} = 700\text{ V}$   
solid lines: continuous; dashed lines: maximum;

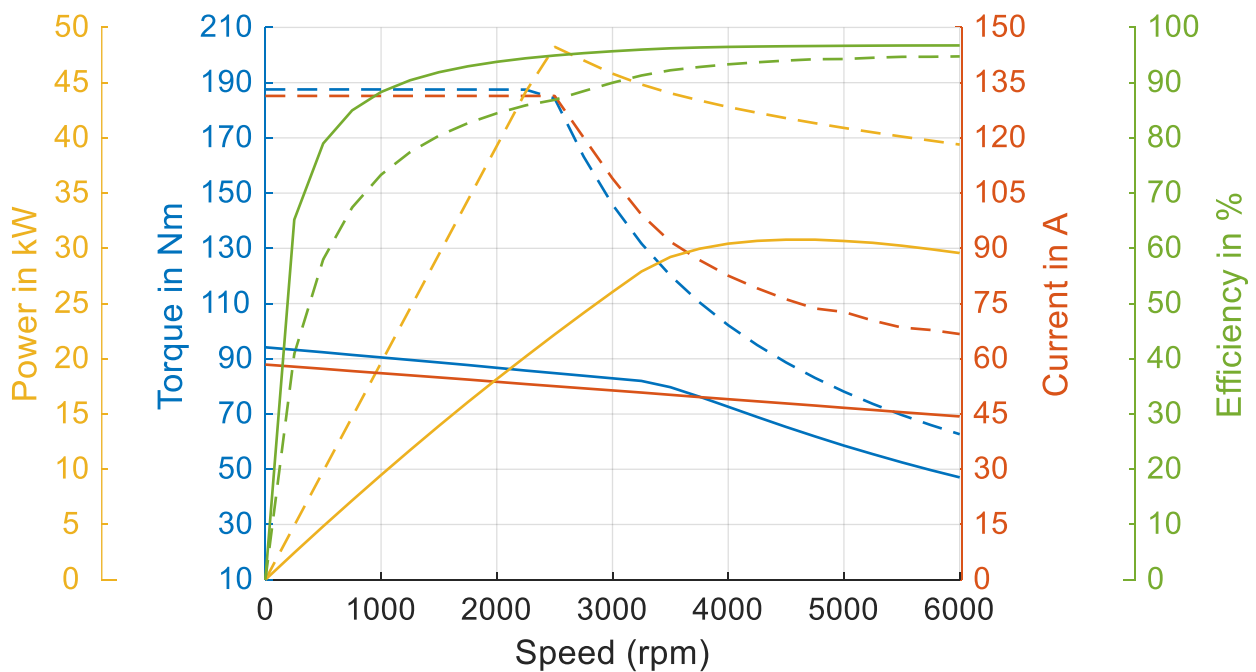

Data, including specifications, contained within this document are summary in nature and subject to change at any time without notice and are intended for general information only. Call for latest revision. All brand names and product names referenced are trademarks, registered trademarks, or trade names of their respective holders.